




ZUWA PTO Pumps

ST-Super and PTO 500



ST-Super

ST-Super with 600 rpm

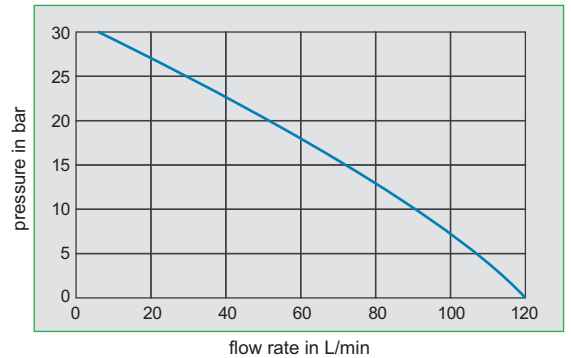


PTO 500 with sieve

PTO 500 with 350 rpm

PTO 500 with 540 rpm

PTO 500 with 700 rpm

PTO 500 with 800 rpm

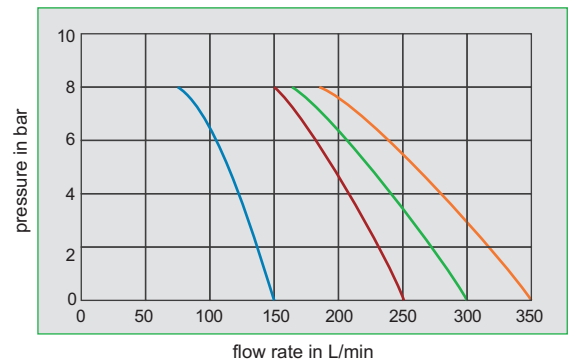

Features

Type	Suction hose	Discharge hose	Hose fittings	Nozzle	Suction filter	Safety chain
ST-Super	3 m, Ø 25 mm	7 m, Ø19 mm	✓	✓	✓	✓
PTO 500	✗	✗	✓	✗	✓	✓

✓ = yes ✗ = no

Technical details

Type	Order no.	Flow rate L/min	Rotation rpm	Max. working pressure	Max. pressure	Weight	Connections in/out
ST-Super	120649	55 - 110	300 - 600	15 bar	30 bar	14 kg	¾", Ø 19 mm
PTO 500	120650	100 - 350	200 - 800	6 bar	10 bar	19 kg	1½", Ø 38 mm



ZUWA-Zumpe GmbH
Pumps and Sprayers

Franz-Fuchs-Straße 13 - 17 • D-83410 Laufen
Fon: +49 (0)8682 89340 • Fax: +49 (0)8682 893434
E-mail: info@zuwa.de • Internet: www.zuwa.de